

PRODUCT TESTING

We proactively engaged in rigorous environmental testing at the esteemed Underwriters Laboratory in Chicago.

This meticulous process is structured to expedite the degradation of roofing panels within a predetermined timeframe. Our products not only endured these stringent tests but also exceeded the most demanding benchmarks established by the facility.

To review our performance details, please visit www.ul.com and reference our listing number R38565.




www.armadurametalroof.com





www.armadurametalroof.com



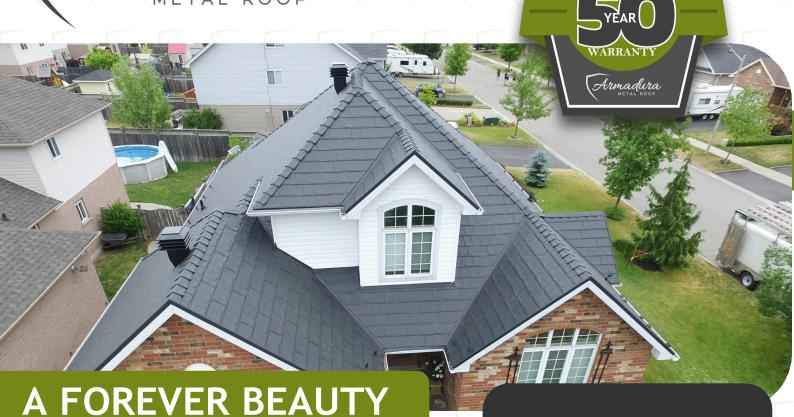

PRODUCT SPECIFICATIONS



Panels Per 100 sq/ft: 30 Weight Per 100 sq/ft: 81 lbs

Panel Exposure: 45.25" x 10.75"

Panel Material: 30 Gauge, ASTM A653

Grade 37, G90 Galvanized

BEAUTIFUL PERMANENT

It starts with Armadura's 4-way interlocking system. Engineered to withstand all weather conditions. Made from the highest-grade galvanized steel.

Manufactured to precise industry standards for longevity.
Add Sherwin-Williams reputable coatings.
Unprecedented home protection.

"MY ARMADURA METAL ROOF LOOKS BETTER THAN ANY OTHER STEEL ROOF I HAVE EVER SEEN"

H. DREW-BROOK - ELORA, ON

CRINKLE



HERITAGE



